

# Drainwell DW1592 Soakwell Specifications

## Super Strong:

Trafficable  $\sim 30\text{t/m}^2 =$   
Can be installed under  
carparks and  
driveways

## Efficient:


65% surface drainage  
area = Drains 50% faster  
than concrete soakwells

## Australian owned and manufactured:

Supporting local business  
and reliable stock availability

## Easy installation:

Light weight and  
easily assembled  
on-site without  
the need of large  
plant machinery

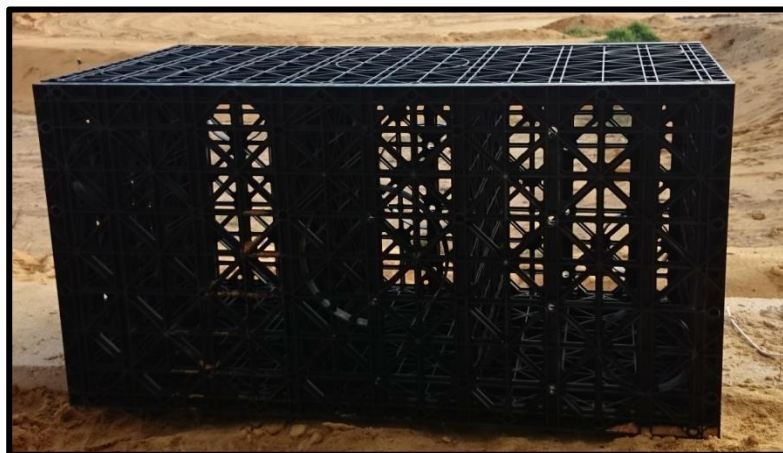

## Will last forever:

UV stabilised  
and resistant to  
degradation by  
biological and  
chemical  
attack

## Versatile:

Individual volume of 132L =  
Can be interconnected to form soakwells of infinite size.  
Perfect for small or enclosed areas as well as wide open  
spaces with high traffic

## Environmentally friendly:

Made from 100%  
recycled  
polypropylene

DW1592 Soakwell	3 panels	4 panels
Weight (kg)	6.65	7.3
Maximum load (Tons/m <sup>2</sup> )	23.66	29.76
Dimensions (mm)	755 (l) x 400 (w) x 440 (h)	
Volume	0.132 m <sup>3</sup> or 132L	
Internal area	<95%	
Polymer type	Polypropylene UV stabilised	
Service temp	-20°C to 120°C	

Chemically inert and not affected by moulds and algae



[simplysoakwellsperth.com.au](http://simplysoakwellsperth.com.au)

E: [admin@simplysoakwellsperth.com.au](mailto:admin@simplysoakwellsperth.com.au) M: 0488905812